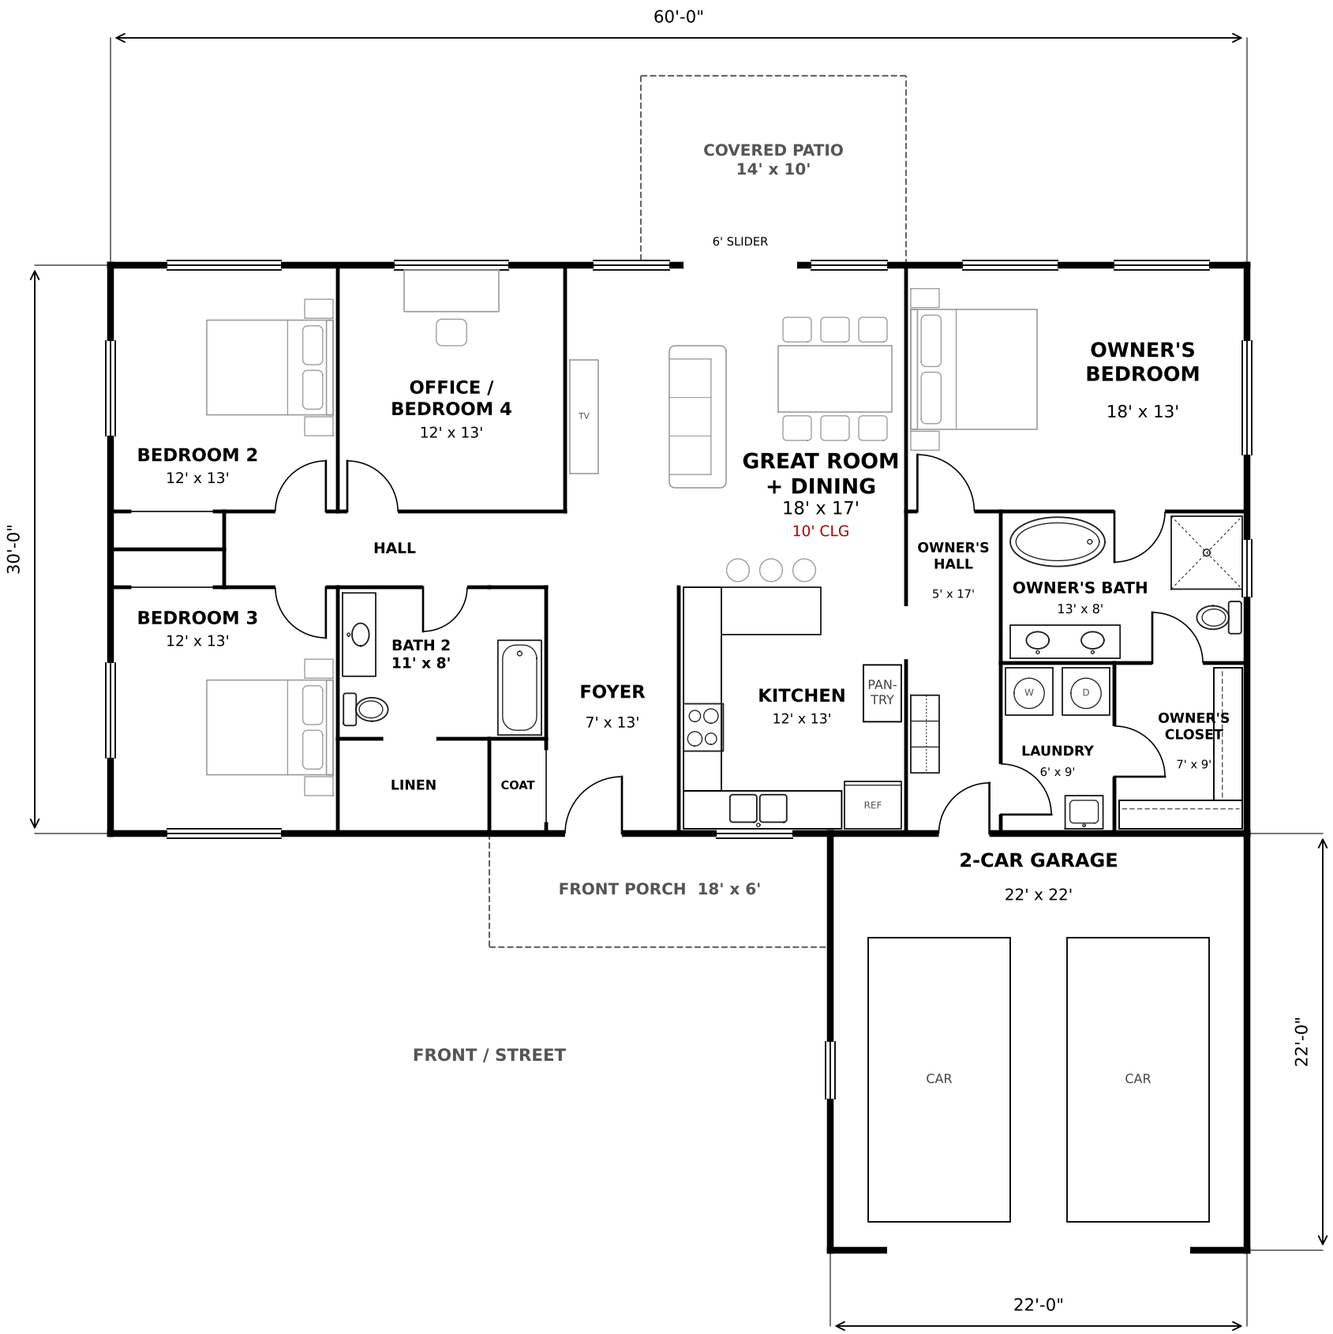



## BUILT AROUND THE OWNER

1. OWNER'S ENTRY: garage door opens into a private hall. Straight ahead 17' is your bedroom door.

2. Drop zone first: lockers + bench by the garage door. Keys, bags, boots stop there.

3. Laundry is the first door off that hall, and it opens into your closet. Washer to hanger: 10 ft.

4. Closet -> bath -> bedroom all connect, so you can get ready without crossing the house.

5. Kitchen opens off the same hall: groceries go garage -> hall -> counter, never through the living room. Peninsula seats 3.

6. Kids' wing + office on the far end, own bath.

7. Simple 60' x 30' box, one main roof.

8. Ceilings 9' unless noted. Great room 10'.

9. Outside: Louisiana farmhouse. White board-and-batten, black windows, cedar posts, architectural shingles.

## AREAS

| | |
|---|---|
| Heated / cooled: | 1,800 sq ft |
| Garage: | 484 sq ft |
| Front porch: | 108 sq ft |
| Covered patio: | 140 sq ft |

## PLAN 003 - OWNER'S ENTRY


3 bed + office | 2 bath | 2-car garage | 1,800 heated sq ft | 60' x 30' footprint

FLOOR PLAN SCALE: 1/8" = 1'-0" on 11x17

**REV 11-08 09:11 AM**

CONCEPT DRAFT - NOT FOR CONSTRUCTION. Structure/wind by others.

SCALE: 3/32" = 1'-0" on 11x17 | Window marks (A-G) and door marks (1-4) -> see A-5 schedule

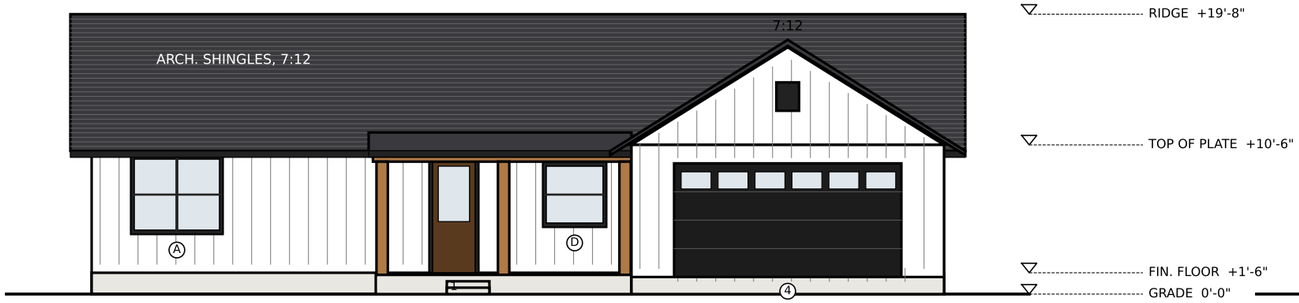



**FRONT ELEVATION (SOUTH)**




**BACK ELEVATION (NORTH)**




**LEFT ELEVATION (WEST)**

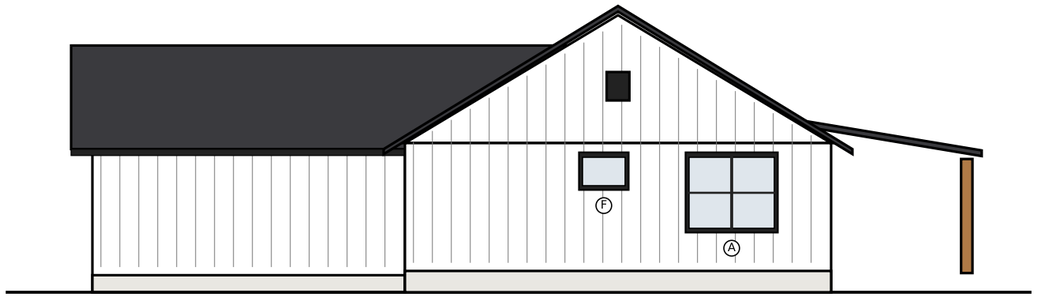


**RIGHT ELEVATION (EAST)**

Finishes: white board-and-batten (1x3 battens @ 16" O.C.) | black window frames + casings | cedar porch posts + beams | architectural shingles | black garage door w/ glass row | 6" K-style gutters

## PLAN 003 - OWNER'S ENTRY


Louisiana farmhouse | 3 bed + office | 2 bath | 1,800 heated sq ft

## A-2 EXTERIOR ELEVATIONS

**REV 11-08 09:11 AM**

CONCEPT DRAFT - NOT FOR CONSTRUCTION. Structure/wind by others.

1/8" = 1'-0"

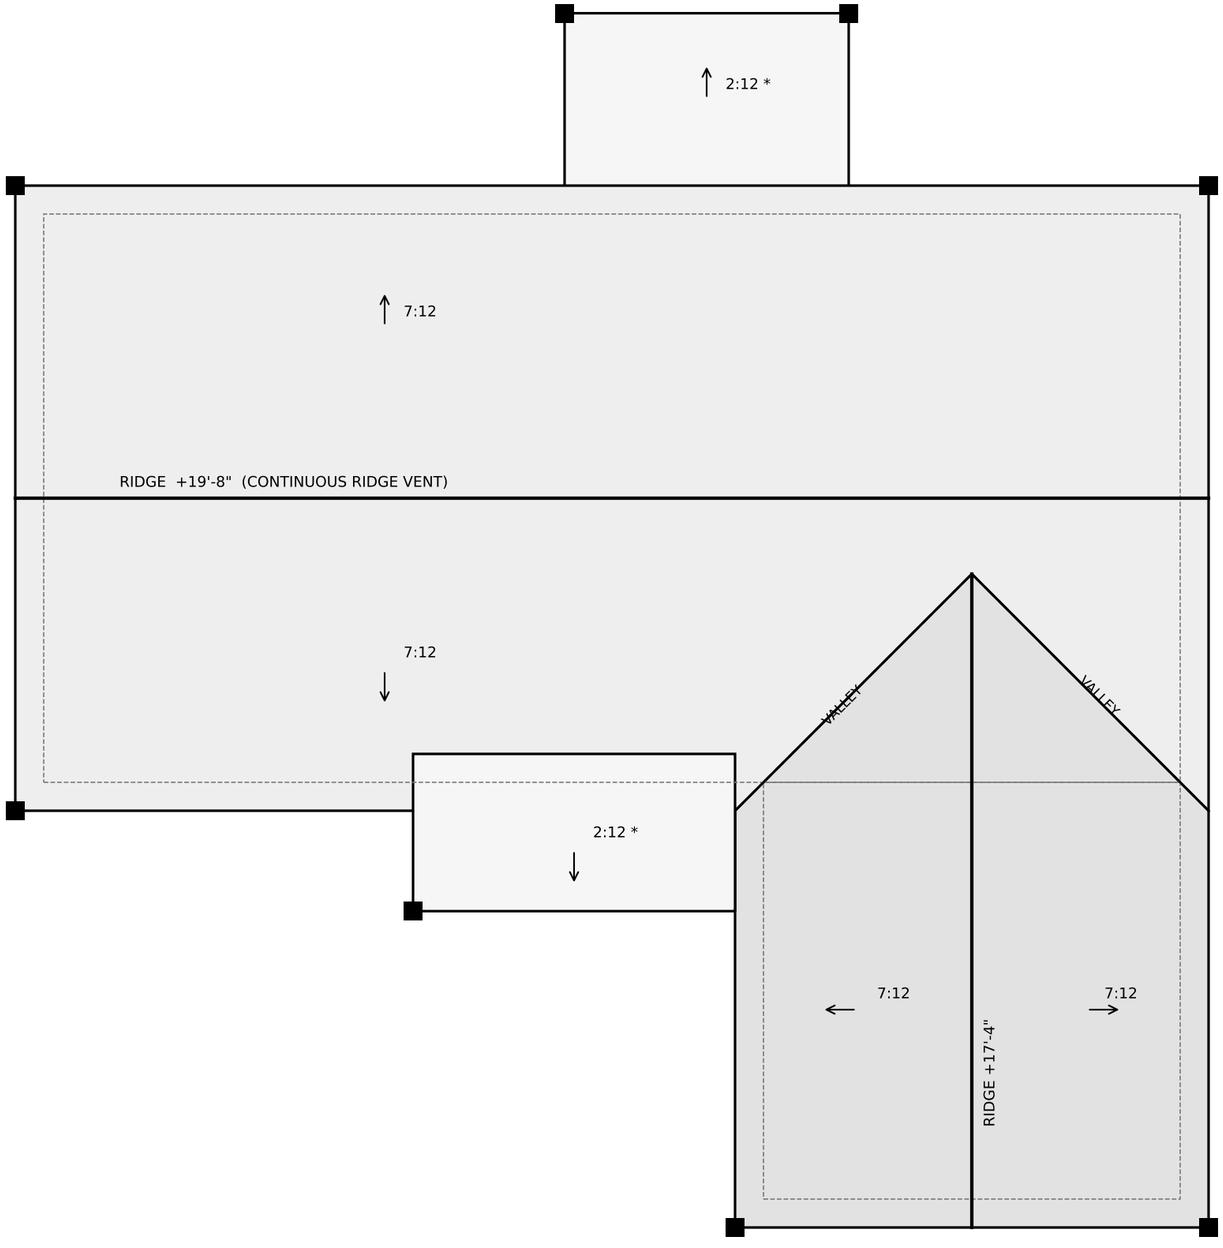


## ROOF NOTES

1. Main house + garage: 7:12, architectural asphalt shingles on synthetic underlayment on 7/16" OSB. Ring-shank sheathing nails where wind design is required (LA amend.).
2. 1'-6" overhangs, vented soffit. Continuous ridge vent. Balance intake/exhaust.
3. * Front porch 2:12 (ties into main roof), patio 2.5:12. Below 4:12 needs DOUBLE underlayment (IRC R905.2.7). Option: standing-seam metal on the sheds.
4. 6" K-style gutters all eaves, 3x4 downspouts at the black squares (8).
5. Ice/water membrane (self-adhered) in both valleys.
6. Trusses 24" O.C. by truss manufacturer, sealed truss drawings. Raised ceiling in great room (10') built into the trusses.
7. Uplift connectors at every truss/rafter per wind design (see A-4 wind note).
8. Attic access: 22x30 min. in owner's hall or garage; attic HVAC needs a 30" wide walkway + platform per IRC M1305.1.3.

**PLAN 003 - OWNER'S ENTRY**

Louisiana farmhouse | 3 bed + office | 2 bath | 1,800 heated sq ft

**A-3 ROOF PLAN**

**REV 11-08 09:11 AM**


CONCEPT DRAFT - NOT FOR CONSTRUCTION. Structure/wind by others.

## WIND + STRUCTURE (READ THIS)


Lafayette area: Vult about 130-140 mph (ASCE 7-16, Risk Cat II) - NOT CONFIRMED. Look up each address at ascehazardtool.org. Exposure B for most subdivision lots; C if open field runs 1,500+ ft upwind.

130 mph or more = hurricane-prone + WIND DESIGN REQUIRED (IRC R301.2.1.1): WFCM, ICC 600 or ASCE 7, not the IRC prescriptive wind tables. Under 140 mph (inland) = not a wind-borne debris region, so impact glass/shutters NOT required by code. 140+ = impact glazing or 7/16" panel shutters (R301.2.1.2).

LA amendments: RSRS-01 ring-shank roof sheathing nails where wind design is required; continuous 7/16" wood structural panel wall sheathing (CZ 2A). Engineer's seal where the parish requires it (builder/buyer to provide). Footings, hold-downs, straps, trusses: per wind design / Louisiana P.E.

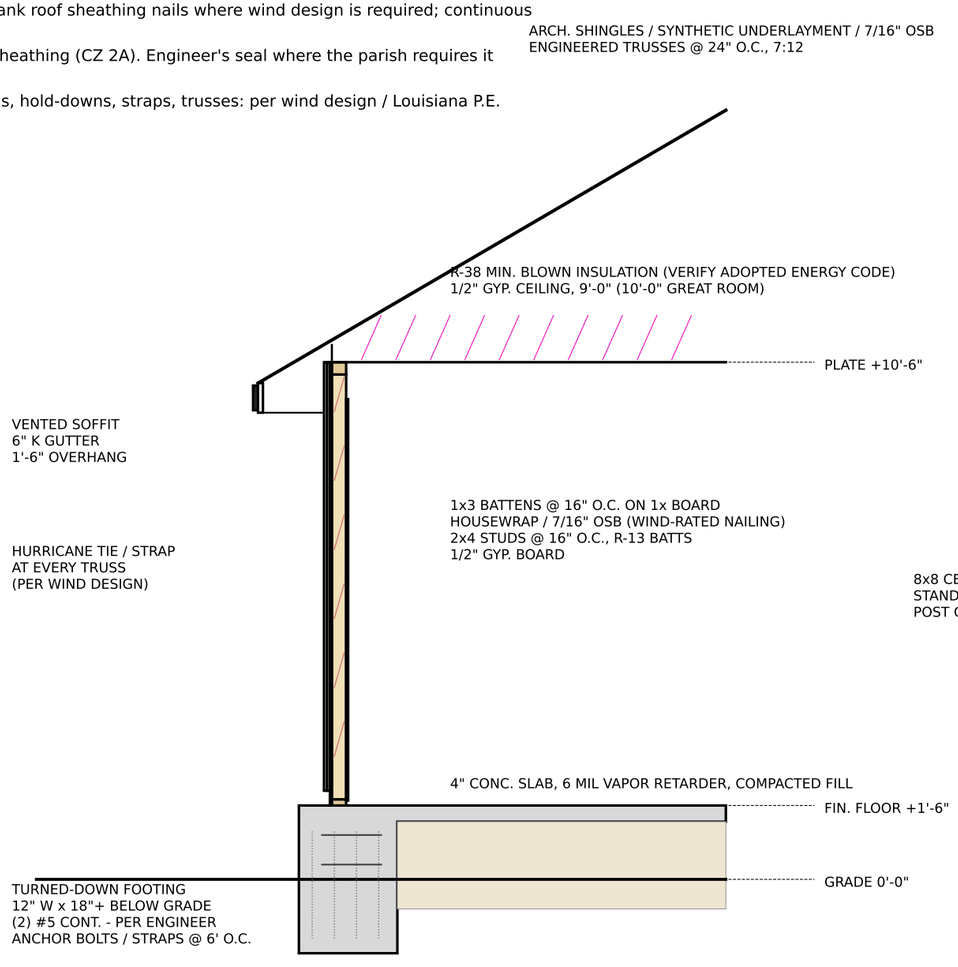


**TYPICAL WALL SECTION**

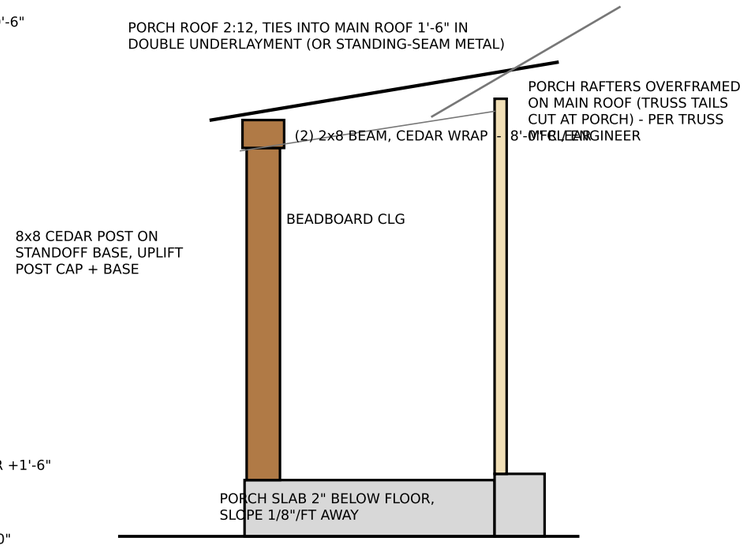


**PORCH SECTION**

# PLAN 003 - OWNER'S ENTRY

Louisiana farmhouse | 3 bed + office | 2 bath | 1,800 heated sq ft

## A-4 WALL + PORCH SECTIONS, WIND

**REV 11-08 09:11 AM**

CONCEPT DRAFT - NOT FOR CONSTRUCTION. Structure/wind by others.

## WINDOW SCHEDULE

| MARK | SIZE (W x H) | TYPE | QTY | WHERE | NOTES |
|---|---|---|---|---|---|
| A | (2) 3050 mulled | Single hung | 4 | Bed 3 front, Bed 2 back, Office back, Owner's east | EGRESS: 5.7 sf net clear, 20" W, 24" H min, sill <= 44" AFF. Verify mfr. data. |
| B | (2) 2050 mulled | Single hung | 2 | Great room back (each side of slider) | TEMPERED (within 24" of slider, sill < 60"). |
| D | (2) 2040 mulled | Single hung | 1 | Kitchen over sink | Sill 42" AFF to clear counter + faucet. |
| E | (2) 2650 mulled | Single hung | 4 | Owner's back (2), Bed 2 west, Bed 3 west | Not the egress window in those rooms. |
| F | 3020 | Fixed, obscure | 1 | Owner's bath (in shower) | TEMPERED (wet area). Sill 6'-0" AFF. |
| G | 3050 | Single hung | 1 | Garage west wall | |

## DOOR SCHEDULE

| MARK | SIZE (W x H) | TYPE | QTY | WHERE | NOTES |
|---|---|---|---|---|---|
| 1 | 3080 | Exterior, fiberglass, half-lite | 1 | Front entry | TEMPERED glass. Deadbolt, threshold, wind-rated. Black. |
| 2 | 2868 | Garage to house | 1 | Garage -> owner's hall | 20-MIN or 1-3/8" solid core, SELF-CLOSING (IRC R302.5.1). |
| 3 | 6080 | Sliding glass, 2 panel | 1 | Great room -> patio | TEMPERED, wind-rated. |
| 4 | 16'x8' | Overhead sectional, insulated | 1 | Garage | Wind-rated. Glass row. Opener + 2 sensors. |
| 5 | 3068 | Interior, swing | 1 | Owner's bedroom | Privacy lockset. |
| 6 | 2868 | Interior, swing | 7 | Beds 2, 3, office, laundry, owner's bath, closet, owner closet<-laundry | |
| 7 | 2468 | Interior, swing | 1 | Bath 2 | Privacy lockset. |
| 8 | (2) 2468 bifold | Bifold | 2 | Bed 2 + Bed 3 closets (4'-6" openings) | Verify rough opening. |
| 9 | 2868 cased opening | Cased opening | 1 | Linen (in Bath 2) | |
| 10 | 4068 bifold | Bifold | 1 | Coat closet (by front door) | |
| -- | 2'-10" cased opening | No door | 1 | Owner's hall -> kitchen | |

GENERAL: Sizes are nominal (3050 = 3'-0" W x 5'-0" H). Heads at 8'-0" AFF (9' ceilings). All windows black frame, low-E, U-factor/SHGC per adopted energy code. Design pressure + impact rating per wind design (A-4). Every bedroom has one egress window (mark A). Tempered glass where IRC R308.4 requires (marked). Verify rough openings with supplier.


**PLAN 003 - OWNER'S ENTRY**

Louisiana farmhouse | 3 bed + office | 2 bath | 1,800 heated sq ft

**A-5 WINDOW + DOOR SCHEDULES**

**REV 11-08 09:11 AM**

CONCEPT DRAFT - NOT FOR CONSTRUCTION. Structure/wind by others.

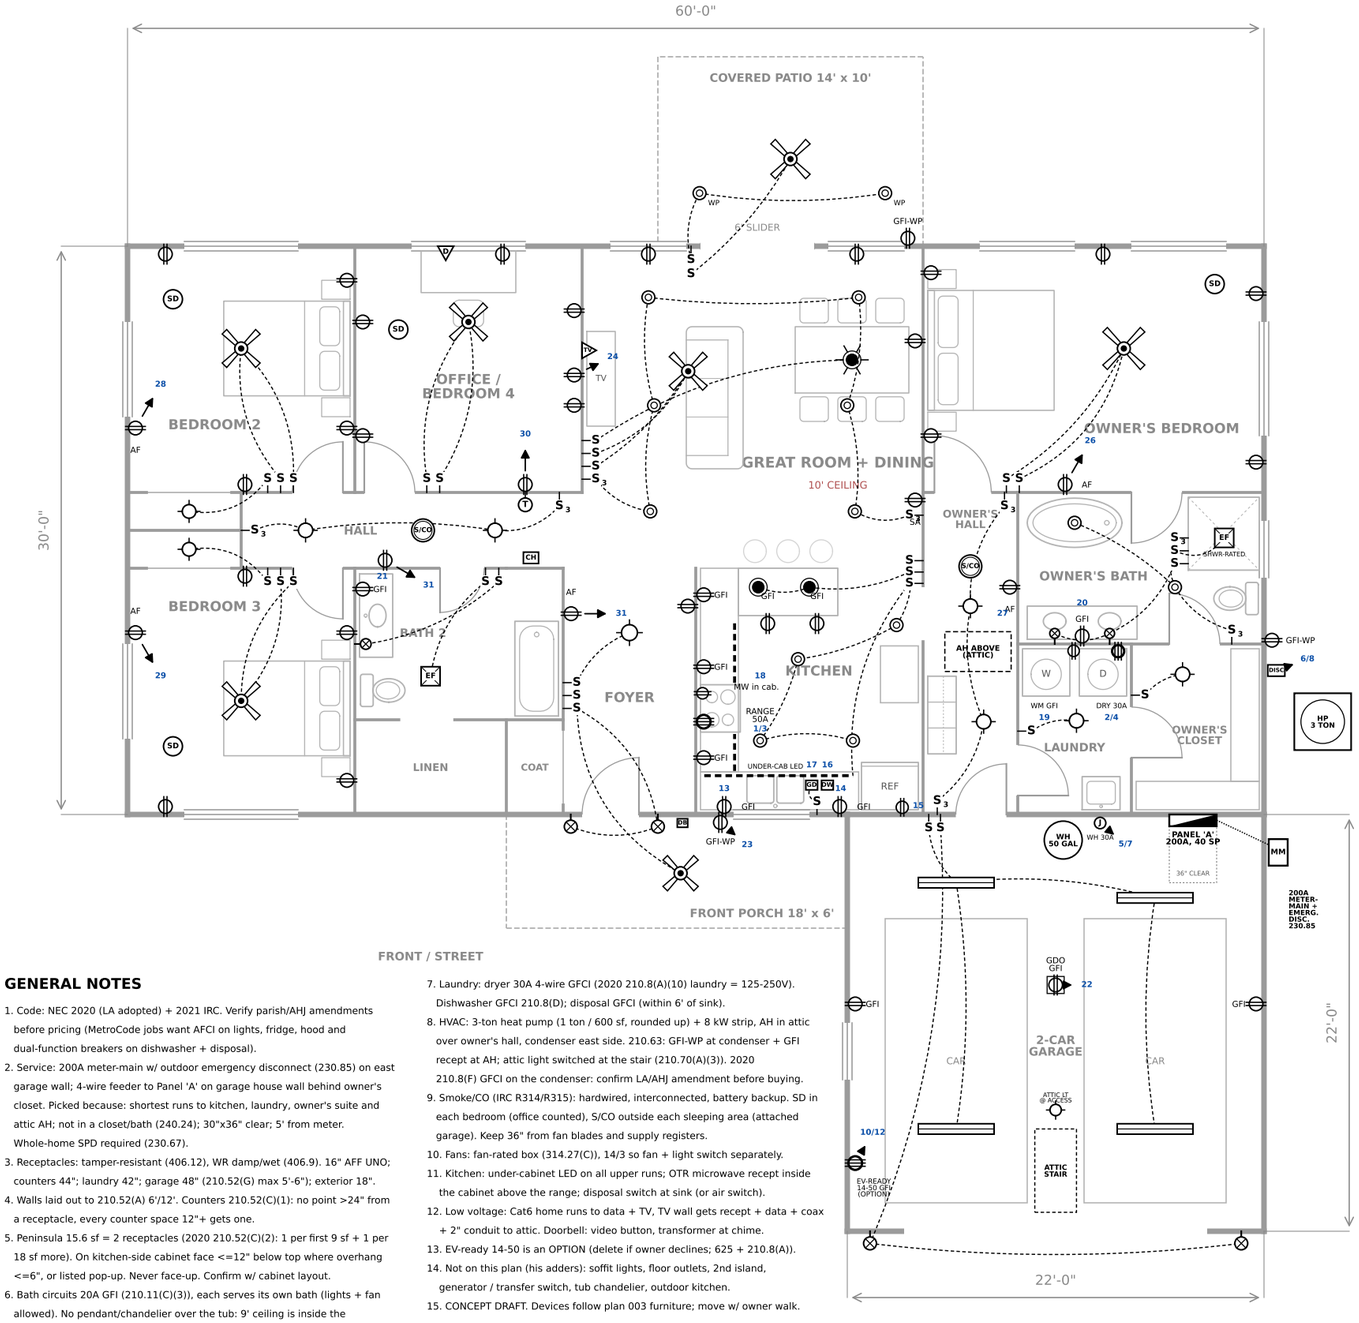


## SYMBOL LEGEND

- Duplex receptacle, 15/20A, TR, 16" AFF UNO
- GFI — GFCI protected (GFI-WP = weatherproof, in-use cover)
- 240V receptacle (rating noted)
- Ceiling receptacle (garage door opener)
- S — Single-pole switch, 48" AFF to top
- S3 — 3-way switch (S4 = 4-way)
- Switch leg (what the switch controls)
- ▶ 13 — Home run to panel 'A', circuit no.
- Recessed LED can / wafer, IC-AT (WP = wet rated)
- Surface ceiling light (fixture by owner)
- Wall light / sconce / coach light
- Pendant (with rays = chandelier)
- Ceiling fan w/ light kit, fan-rated box
- 4' LED wrap / strip
- Under-cabinet LED
- EF — Exhaust fan, vent to exterior
- SD — Smoke alarm, hardwired, interconnected
- S/CO — Combination smoke + CO alarm
- D — Data, Cat6 (TV = data + coax)
- T — Thermostat (low voltage by HVAC)
- DB / CH — Doorbell button / chime
- J — Junction box, hardwired equipment
- DISC — Disconnect, NEMA 3R
- Panelboard

*AF = AFCI  GFI = GFCI  SA = kitchen small-appliance ckt*

## PANEL 'A'  200A  120/240V 1Φ 3W  40 SPACE

Fed from 200A meter-main outside (east garage wall). 4/0 Al SER feeder, neutral/ground separated.

| CKT | LOAD | BKR | TYPE | WIRE |
|---|---|---|---|---|
| 1/3 | Range (NEMA 14-50) | 50/2 | - | 6/3 |
| 2/4 | Dryer (NEMA 14-30), laundry | 30/2 | GF | 10/3 |
| 5/7 | Water heater 50 gal, 4.5 kW (garage) | 30/2 | - | 10/2 |
| 6/8 | Heat pump condenser 3 ton * | 30/2 | - | 10/2 |
| 9/11 | Air handler w/ 8 kW strip (attic) * | 50/2 | - | 6/2 |
| 10/12 | EV-ready 14-50, garage (OPTION) | 50/2 | GF | 6/3 |
| 13 | Kitchen counter SA-1 (left of sink, range wall) | 20 | AF+GF | 12/2 |
| 14 | Kitchen counter SA-2 (right of sink, peninsula, dining) | 20 | AF+GF | 12/2 |
| 15 | Refrigerator | 20 | AF | 12/2 |
| 16 | Dishwasher | 20 | AF+GF | 12/2 |
| 17 | Disposal | 20 | AF+GF | 12/2 |
| 18 | Microwave over range | 20 | AF | 12/2 |
| 19 | Washer + laundry | 20 | AF+GF | 12/2 |
| 20 | Owner's bath recepts, lights, fan | 20 | GF | 12/2 |
| 21 | Bath 2 recepts, light, fan | 20 | GF | 12/2 |
| 22 | Garage recepts + opener | 20 | GF | 12/2 |
| 23 | Exterior WP recepts (front, back, HVAC) | 20 | GF | 12/2 |
| 24 | Great room recepts + TV wall | 20 | AF | 12/2 |
| 25 | Great room, dining, kitchen lts + fan | 15 | AF | 14/2-3 |
| 26 | Owner's bedroom recepts + fan/light | 15 | AF | 14/2-3 |
| 27 | Owner's hall, laundry, closet lts, hall rec | 15 | AF | 14/2-3 |
| 28 | Bedroom 2 recepts + lights | 15 | AF | 14/2-3 |
| 29 | Bedroom 3 recepts + lights | 15 | AF | 14/2-3 |
| 30 | Office / bedroom 4 recepts + lights | 15 | AF | 14/2-3 |
| 31 | Foyer, hall lts + recepts, ALL smoke/CO | 15 | AF | 14/2-3 |
| 32 | Garage lts, attic lt + attic HVAC recept (GFI) | 15 | - | 14/2 |
| 33 | Exterior lights, porch + patio fans | 15 | - | 14/2-3 |
| 34/36 | Surge protective device (230.67) | 20/2 | SPD | - |
| 35-40 | Spare / space (6) | | | |

AF = combination AFCI breaker.  GF = GFCI.  AF+GF = dual-function AFCI/GFCI breaker OR AFCI breaker + GFCI receptacle at the first device. Both are code; price both.

Kitchen circuits are 20A AFCI, always.  * HVAC breakers per nameplate MOCP.

6 two-pole + SPD = 14 spaces; 21 single = 21 spaces; 35 of 40 used.

**LOAD CALC (NEC 220.82, see load-calc.pdf)**

General loads 46,200 VA -> 24,480 VA after demand

Heat (larger HVAC option) 10,900 VA

**TOTAL 35,380 VA = 147.4 A at 240V  ->  min. 150 A**

200A service provided (53 A headroom; EV option included).

## GENERAL NOTES

1. Code: NEC 2020 (LA adopted) + 2021 IRC. Verify parish/AHJ amendments before pricing (MetroCode jobs want AFCI on lights, fridge, hood and dual-function breakers on dishwasher + disposal).
2. Service: 200A meter-main w/ outdoor emergency disconnect (230.85) on east garage wall; 4-wire feeder to Panel 'A' on garage house wall behind owner's closet. Picked because: shortest runs to kitchen, laundry, owner's suite and attic AH; not in a closet/bath (240.24); 30"x36" clear; 5' from meter. Whole-home SPD required (230.67).
3. Receptacles: tamper-resistant (406.12), WR damp/wet (406.9). 16" AFF UNO; counters 44"; laundry 42"; garage 48" (210.52(G) max 5'-6"); exterior 18".
4. Walls laid out to 210.52(A) 6'/12'. Counters 210.52(C)(1): no point >24" from a receptacle, every counter space 12"+ gets one.
5. Peninsula 15.6 sf = 2 receptacles (2020 210.52(C)(2): 1 per first 9 sf + 1 per 18 sf more). On kitchen-side cabinet face <=12" below top where overhang <=6", or listed pop-up. Never face-up. Confirm w/ cabinet layout.
6. Bath circuits 20A GFI (210.11(C)(3)), each serves its own bath (lights + fan allowed). No pendant/chandelier over the tub: 9' ceiling is inside the 410.10(D) zone (3' horiz / 8' above rim). Wet-rated can only.
7. Laundry: dryer 30A 4-wire GFCI (2020 210.8(A)(10) laundry = 125-250V). Dishwasher GFCI 210.8(D); disposal GFCI (within 6' of sink).
8. HVAC: 3-ton heat pump (1 ton / 600 sf, rounded up) + 8 kW strip, AH in attic over owner's hall, condenser east side. 210.63: GFI-WP at condenser + GFI recept at AH; attic light switched at the stair (210.70(A)(3)). 2020 210.8(F) GFCI on the condenser: confirm LA/AHJ amendment before buying.
9. Smoke/CO (IRC R314/R315): hardwired, interconnected, battery backup. SD in each bedroom (office counted), S/CO outside each sleeping area (attached garage). Keep 36" from fan blades and supply registers.
10. Fans: fan-rated box (314.27(C)), 14/3 so fan + light switch separately.
11. Kitchen: under-cabinet LED on all upper runs; OTR microwave recept inside the cabinet above the range; disposal switch at sink (or air switch).
12. Low voltage: Cat6 home runs to data + TV, TV wall gets recept + data + coax + 2" conduit to attic. Doorbell: video button, transformer at chime.
13. EV-ready 14-50 is an OPTION (delete if owner declines; 625 + 210.8(A)).
14. Not on this plan (his adders): soffit lights, floor outlets, 2nd island, generator / transfer switch, tub chandelier, outdoor kitchen.
15. CONCEPT DRAFT. Devices follow plan 003 furniture; move w/ owner walk.

# PLAN 003  -  OWNER'S ENTRY

3 bed + office  |  2 bath  |  2-car garage  |  1,800 heated sq ft  |  all-electric  |  200A service

**E-1 ELECTRICAL PLAN  SCALE: 1/8" = 1'-0" on 11x17**

**E-1**

CONCEPT DRAFT - NOT FOR CONSTRUCTION.  Verify w/ AHJ + owner selections.

**REV 11-08 09:11 AM**

**Foch An Electrical Co.**
Licensed Electrical Contractor · Lic. 55468

(337) 277-9200
fochelc.com
Lafayette, LA

# RESIDENTIAL LOAD CALCULATION

Single family dwelling · NEC 2020 Article 220.82, Optional Method · 120/240V single phase

| | | | |
|---|---|---|---|
| **Address** | Plan 003 "Owner's Entry" (concept) | **Date** | 11/07/2026 |
| **Owner** | Spec / TBD | **Builder** | TBD |
| **Living area** | 1,800 sq ft | **Prepared by** | Andrew Young |

## A. GENERAL LOADS · 220.82(B)

| | | | |
|---|---|---|---|
| 1 | Lighting and receptacles | 1,800 sq ft × 3 VA | 5,400 |
| 2 | Small appliance circuits | 2 × 1,500 VA | 3,000 |
| 3 | Laundry circuit | 1 × 1,500 VA | 1,500 |
| 4 | Electric range | 12 kW nameplate (assumed) | 12,000 |
| 5 | Electric clothes dryer | Nameplate, 5,000 VA min (220.54) | 5,000 |
| 6 | Water heater, 50 gal electric (garage) | 4,500 W elements | 4,500 |
| 7 | Dishwasher | Nameplate / typical | 1,200 |
| 8 | Disposal | Nameplate / typical | 900 |
| 9 | Microwave over range | Nameplate / typical | 1,500 |
| 10 | Refrigerator | Nameplate / typical | 800 |
| 11 | Bath exhaust fans | 2 x 100 VA | 200 |
| 12 | Garage door opener | 1 door x 600 VA | 600 |
| 13 | EV-ready 14-50 receptacle (OPTION) | 40 A charger x 240 V (220.57, > 7,200) | 9,600 |
| | **Subtotal** | | **46,200** |
| | First 10,000 VA at 100% | | 10,000 |
| | Remainder 36,200 VA at 40% | | 14,480 |
| | **General load after demand** | | **24,480** |

## B. HEATING AND AIR CONDITIONING · 220.82(C), LARGER OF

| | | | |
|---|---|---|---|
| | Heat pump heating: compressor + blower, plus 65% of 8 kW strip used | 5,700 + 0.65 x 8,000 (220.82(C)(4)) | 10,900 |
| | Heat pump cooling, 3 ton + air handler blower | ~1,900 VA / ton | 5,700 |

## GAS APPLIANCES (NOT PART OF THE ELECTRICAL LOAD)

None

| CALCULATED LOAD | AT 240V SINGLE PHASE | SERVICE REQUIRED |
|---|---|---|
| **35,380 VA** | **147.4 A** | **150 A** |
| 35.4 KVA | 24,480 + 10,900 VA ÷ 240V | NEC 220.82 AT 100%, UP TO 150 A |

## NOTES

- All-electric house assumed: no gas on the plan. If the builder brings gas (range, dryer, water heater), rerun; the number only drops.
- Heat pump size is not on the plan: 1 ton per 600 sq ft of living area = 3 ton. 8 kW strip assumed (south Louisiana). Use the real condenser + air handler nameplates when picked.
- Small appliance circuits: 2 kitchen counter circuits (SA-1, SA-2, island + dining on SA-2). Laundry: 1.
- EV-ready 14-50 is an option. Without it: 31,540 VA = 131.4 A (still a 150 A minimum). It is included so the service is sized for it.
- Calc is under 200 A, so the 200 A meter-main + 200 A panel shown on E-1 is enough, with room for a future generator transfer switch.
- No gas appliances, so there is nothing to list for gas line sizing.

Signature _____ Name / Lic. 55468 _____ Date _____