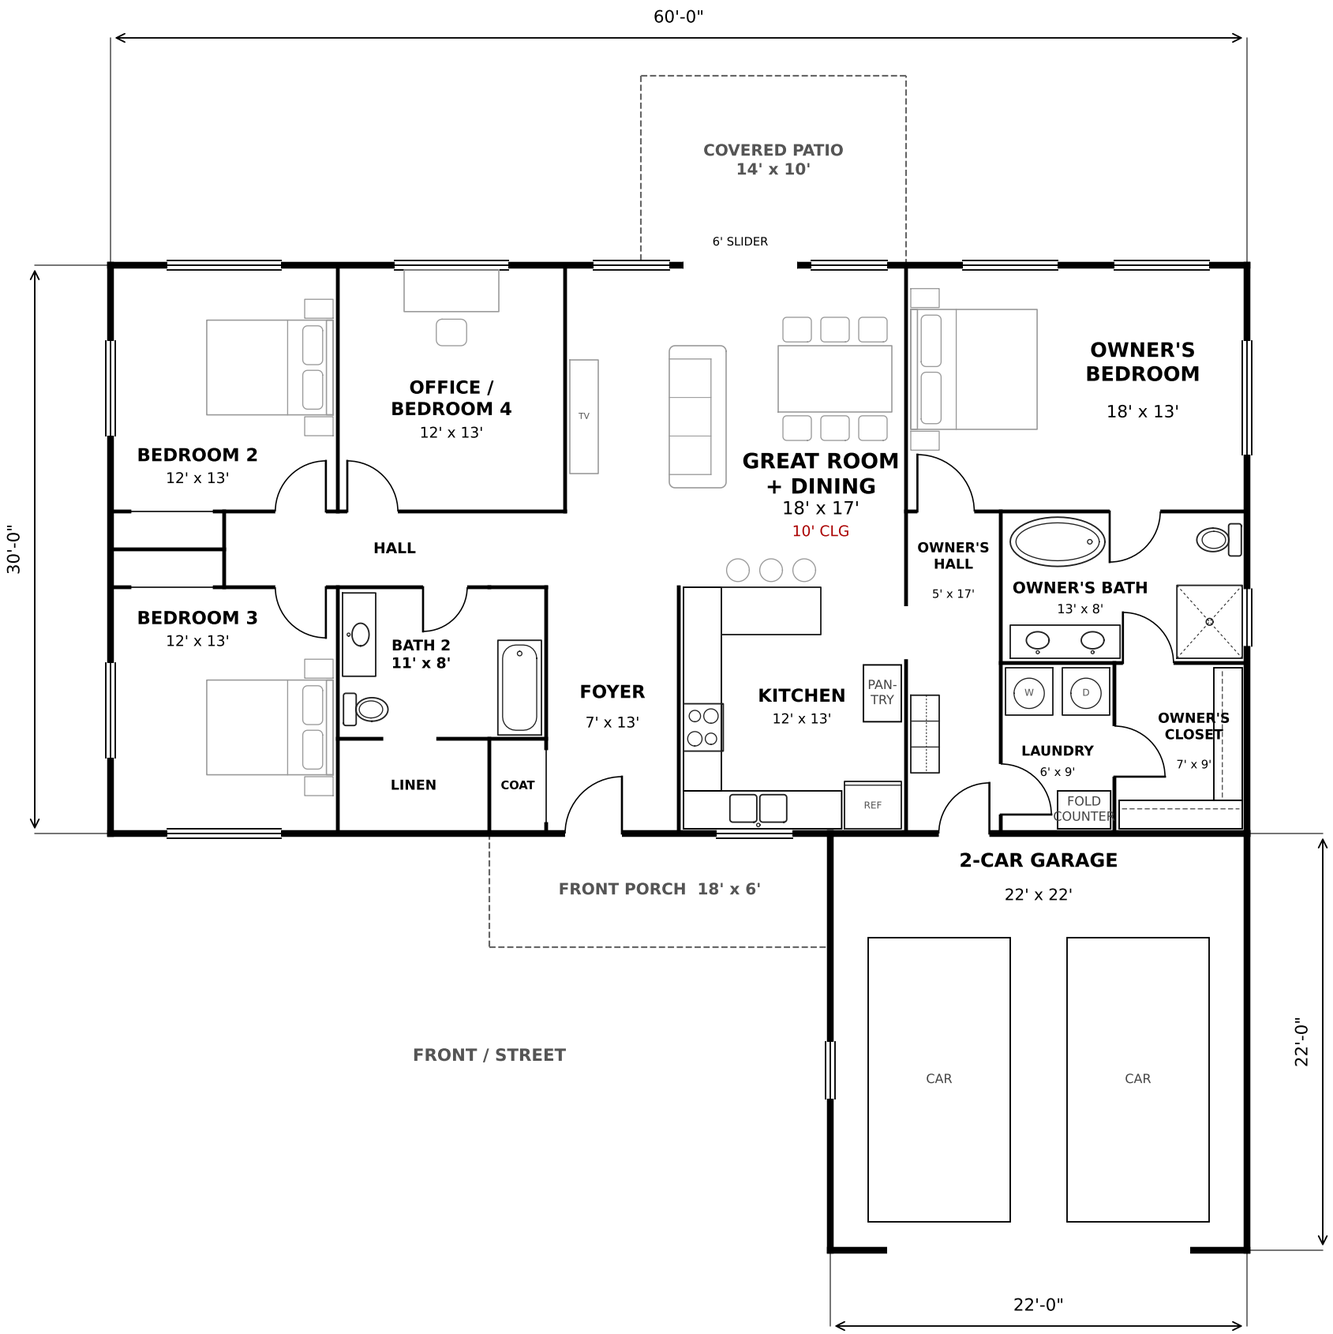


BUILT AROUND THE OWNER

1. OWNER'S ENTRY: garage door opens into a private hall. Straight ahead 17' is your bedroom door.

2. Drop zone first: lockers + bench by the garage door. Keys, bags, boots stop there.

3. Laundry is the first door off that hall, and it opens into your closet. Washer to hanger: 10 ft.

4. Closet -> bath -> bedroom all connect, so you can get ready without crossing the house.

5. Kitchen opens off the same hall: groceries go garage -> hall -> counter, never through the living room. Peninsula seats 3.

6. Kids' wing + office on the far end, own bath.

7. Simple 60' x 30' box, one main roof.

8. Ceilings 9' unless noted. Great room 10'.

9. Outside: Louisiana farmhouse. White board-and-batten, black windows, cedar posts, architectural shingles.

AREAS

Heated / cooled:	1,800 sq ft
Garage:	484 sq ft
Front porch:	108 sq ft
Covered patio:	140 sq ft

PLAN 003 - OWNER'S ENTRY

3 bed + office | 2 bath | 2-car garage | 1,800 heated sq ft | 60' x 30' footprint

FLOOR PLAN SCALE: 1/8" = 1'-0" on 11x17

REV 11-08 12:35 PM

CONCEPT DRAFT - NOT FOR CONSTRUCTION. Structure/wind by others.


SCALE: 3/32" = 1'-0" on 11x17 | Window marks (A-G) and door marks (1-4) -> see A-5 schedule




FRONT ELEVATION (SOUTH)



BACK ELEVATION (NORTH)

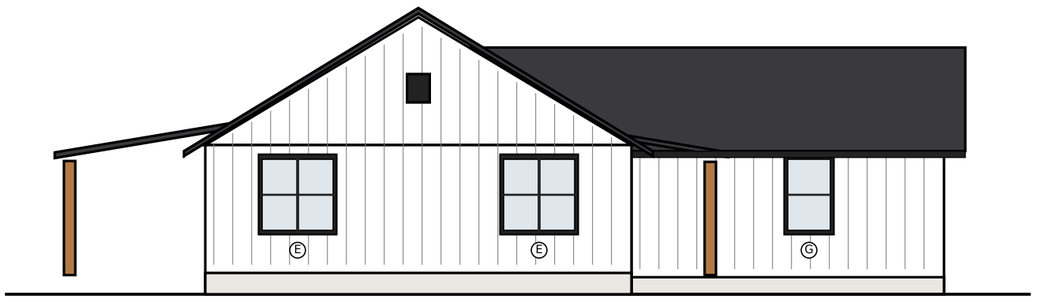

LEFT ELEVATION (WEST)

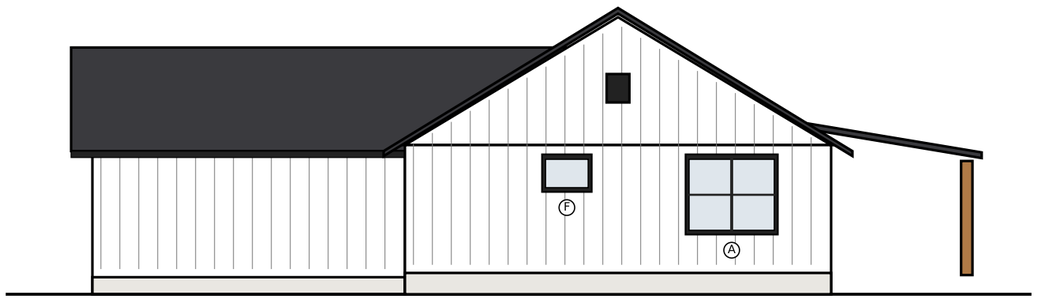

RIGHT ELEVATION (EAST)

Finishes: white board-and-batten (1x3 battens @ 16" O.C.) | black window frames + casings | cedar porch posts + beams | architectural shingles | black garage door w/ glass row | 6" K-style gutters

PLAN 003 - OWNER'S ENTRY


Louisiana farmhouse | 3 bed + office | 2 bath | 1,800 heated sq ft

A-2 EXTERIOR ELEVATIONS

REV 11-08 12:35 PM

CONCEPT DRAFT - NOT FOR CONSTRUCTION. Structure/wind by others.

1/8" = 1'-0"

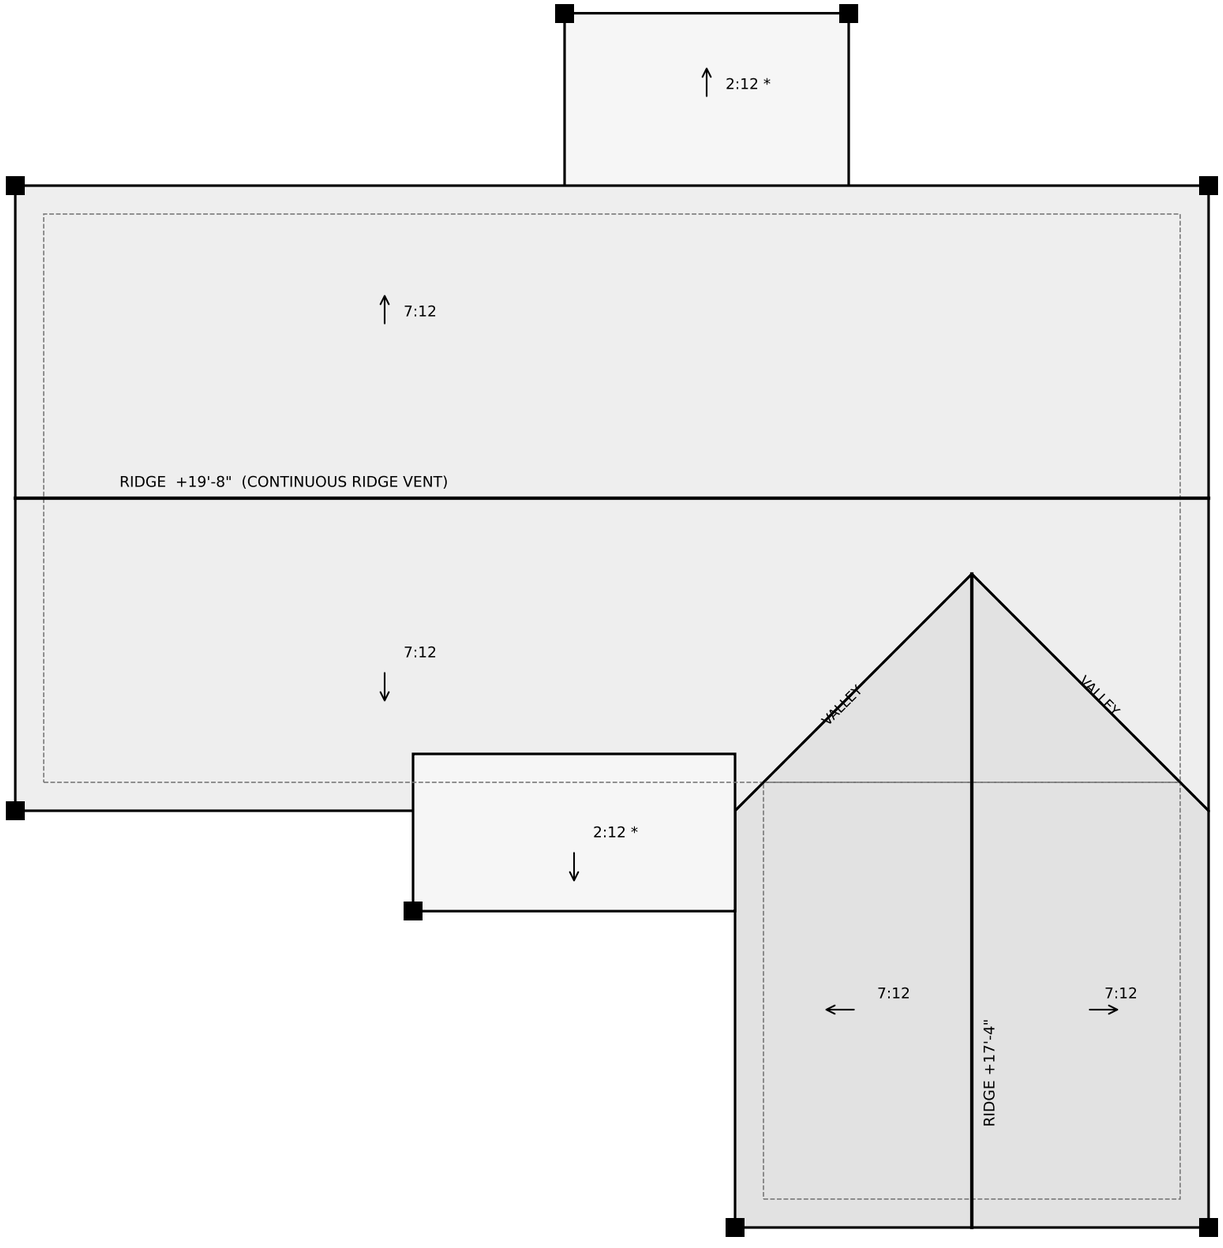

ROOF NOTES

1. Main house + garage: 7:12, architectural asphalt shingles on synthetic underlayment on 7/16" OSB. Ring-shank sheathing nails where wind design is required (LA amend.).
2. 1'-6" overhangs, vented soffit. Continuous ridge vent. Balance intake/exhaust.
3. * Front porch 2:12 (ties into main roof), patio 2.5:12. Below 4:12 needs DOUBLE underlayment (IRC R905.2.7). Option: standing-seam metal on the sheds.
4. 6" K-style gutters all eaves, 3x4 downspouts at the black squares (8).
5. Ice/water membrane (self-adhered) in both valleys.
6. Trusses 24" O.C. by truss manufacturer, sealed truss drawings. Raised ceiling in great room (10') built into the trusses.
7. Uplift connectors at every truss/rafter per wind design (see A-4 wind note).
8. Attic access: 22x30 min. in owner's hall or garage; attic HVAC needs a 30" wide walkway + platform per IRC M1305.1.3.

PLAN 003 - OWNER'S ENTRY

Louisiana farmhouse | 3 bed + office | 2 bath | 1,800 heated sq ft

A-3 ROOF PLAN

REV 11-08 12:35 PM


CONCEPT DRAFT - NOT FOR CONSTRUCTION. Structure/wind by others.

WIND + STRUCTURE (READ THIS)


Lafayette area: Vult about 130-140 mph (ASCE 7-16, Risk Cat II) - NOT CONFIRMED. Look up each address at ascehazardtool.org. Exposure B for most subdivision lots; C if open field runs 1,500+ ft upwind.

130 mph or more = hurricane-prone + WIND DESIGN REQUIRED (IRC R301.2.1.1): WFCM, ICC 600 or ASCE 7, not the IRC prescriptive wind tables. Under 140 mph (inland) = not a wind-borne debris region, so impact glass/shutters NOT required by code. 140+ = impact glazing or 7/16" panel shutters (R301.2.1.2).

LA amendments: RSRS-01 ring-shank roof sheathing nails where wind design is required; continuous 7/16" wood structural panel wall sheathing (CZ 2A). Engineer's seal where the parish requires it (builder/buyer to provide). Footings, hold-downs, straps, trusses: per wind design / Louisiana P.E.

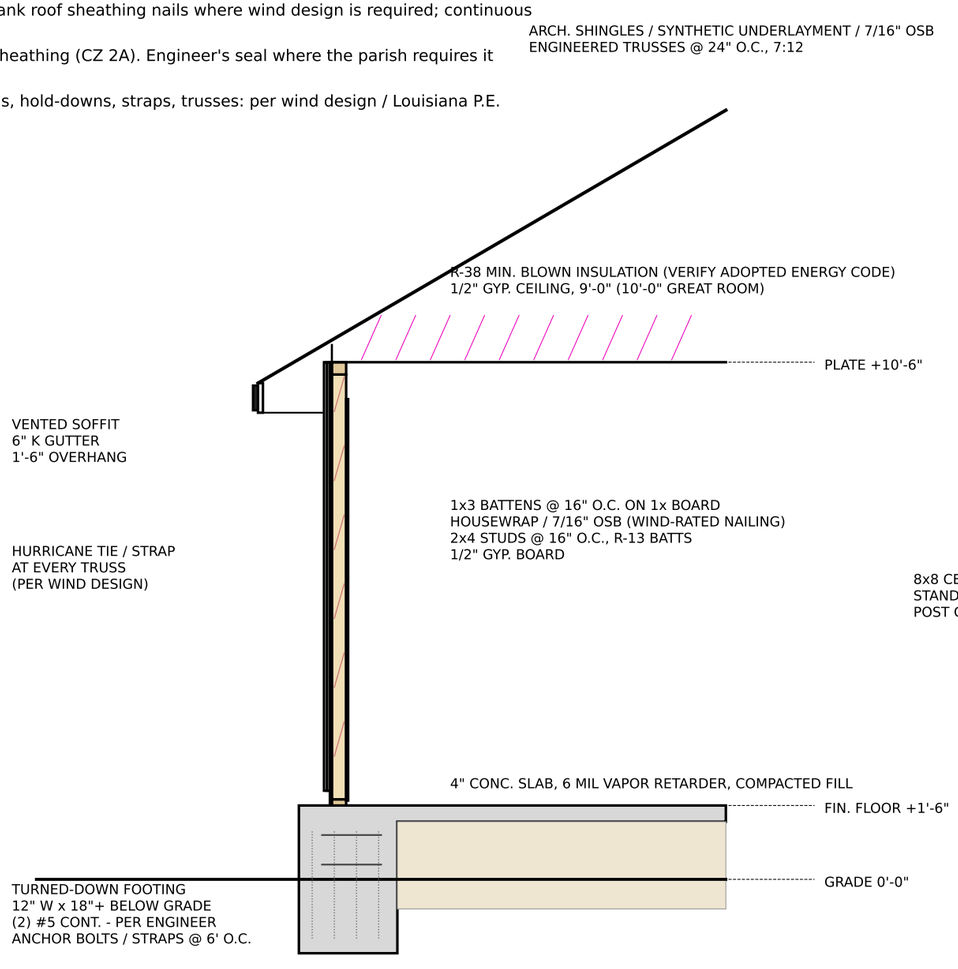

TYPICAL WALL SECTION

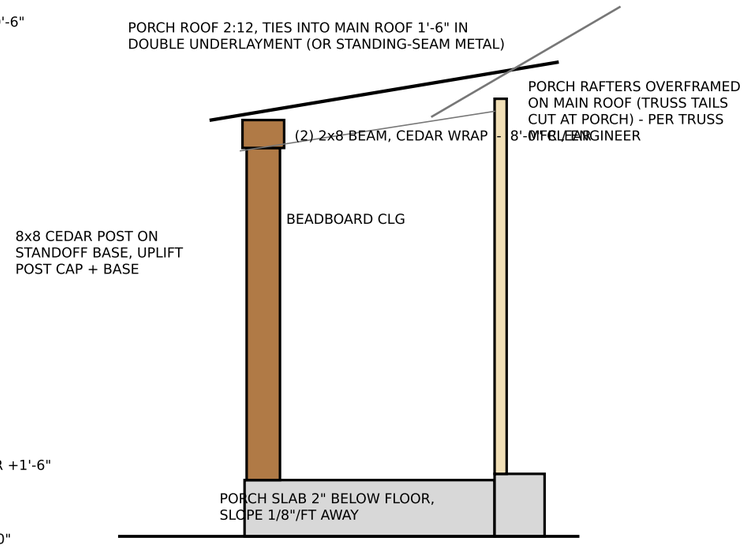

PORCH SECTION

PLAN 003 - OWNER'S ENTRY

Louisiana farmhouse | 3 bed + office | 2 bath | 1,800 heated sq ft

A-4 WALL + PORCH SECTIONS, WIND

REV 11-08 12:35 PM

CONCEPT DRAFT - NOT FOR CONSTRUCTION. Structure/wind by others.

WINDOW SCHEDULE

MARK	SIZE (W x H)	TYPE	QTY	WHERE	NOTES
A	(2) 3050 mulled	Single hung	4	Bed 3 front, Bed 2 back, Office back, Owner's east	EGRESS: 5.7 sf net clear, 20" W, 24" H min, sill <= 44" AFF. Verify mfr. data.
B	(2) 2050 mulled	Single hung	2	Great room back (each side of slider)	TEMPERED (within 24" of slider, sill < 60").
D	(2) 2040 mulled	Single hung	1	Kitchen over sink	Sill 42" AFF to clear counter + faucet.
E	(2) 2650 mulled	Single hung	4	Owner's back (2), Bed 2 west, Bed 3 west	Not the egress window in those rooms.
F	3020	Fixed, obscure	1	Owner's bath (in shower)	TEMPERED (wet area). Sill 6'-0" AFF.
G	3050	Single hung	1	Garage west wall	

DOOR SCHEDULE

MARK	SIZE (W x H)	TYPE	QTY	WHERE	NOTES
1	3080	Exterior, fiberglass, half-lite	1	Front entry	TEMPERED glass. Deadbolt, threshold, wind-rated. Black.
2	2868	Garage to house	1	Garage -> owner's hall	20-MIN or 1-3/8" solid core, SELF-CLOSING (IRC R302.5.1).
3	6080	Sliding glass, 2 panel	1	Great room -> patio	TEMPERED, wind-rated.
4	16'x8'	Overhead sectional, insulated	1	Garage	Wind-rated. Glass row. Opener + 2 sensors.
5	3068	Interior, swing	1	Owner's bedroom	Privacy lockset.
6	2868	Interior, swing	7	Beds 2, 3, office, laundry, owner's bath, closet, owner closet<-laundry	
7	2468	Interior, swing	1	Bath 2	Privacy lockset.
8	(2) 2468 bifold	Bifold	2	Bed 2 + Bed 3 closets (4'-6" openings)	Verify rough opening.
9	2868 cased opening	Cased opening	1	Linen (in Bath 2)	
10	4068 bifold	Bifold	1	Coat closet (by front door)	
--	2'-10" cased opening	No door	1	Owner's hall -> kitchen	

GENERAL: Sizes are nominal (3050 = 3'-0" W x 5'-0" H). Heads at 8'-0" AFF (9' ceilings). All windows black frame, low-E, U-factor/SHGC per adopted energy code. Design pressure + impact rating per wind design (A-4). Every bedroom has one egress window (mark A). Tempered glass where IRC R308.4 requires (marked). Verify rough openings with supplier.


PLAN 003 - OWNER'S ENTRY

Louisiana farmhouse | 3 bed + office | 2 bath | 1,800 heated sq ft

A-5 WINDOW + DOOR SCHEDULES

REV 11-08 12:35 PM

CONCEPT DRAFT - NOT FOR CONSTRUCTION. Structure/wind by others.

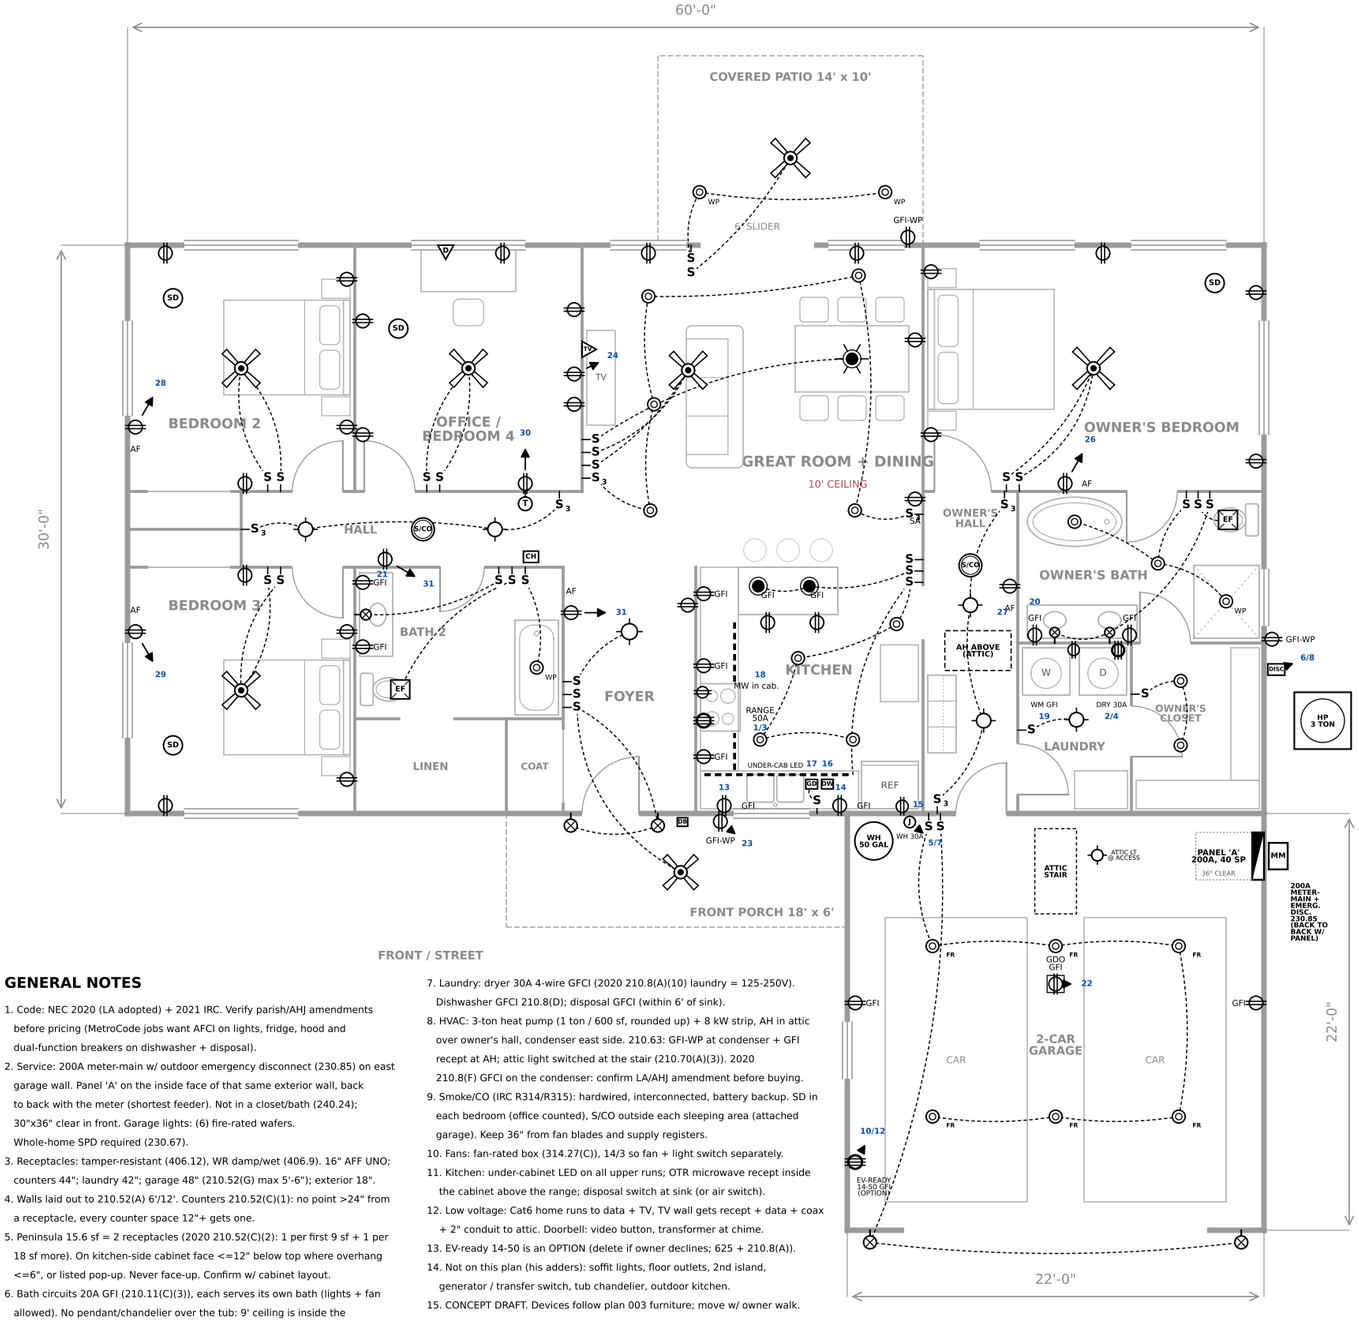

SYMBOL LEGEND

- Duplex receptacle, 15/20A, TR, 16" AFF UNO
- GFCI protected (GFI-WP = weatherproof, in-use cover)
- 240V receptacle (rating noted)
- Ceiling receptacle (garage door opener)
- Single-pole switch, 48" AFF to top
- 3-way switch (S4 = 4-way)
- Switch leg (what the switch controls)
- Home run to panel 'A', circuit no.
- Recessed LED can / wafer, IC-AT (WP = wet rated)
- Surface ceiling light (fixture by owner)
- Wall light / sconce / coach light
- Pendant (with rays = chandelier)
- Ceiling fan w/ light kit, fan-rated box
- Under-cabinet LED
- Exhaust fan, vent to exterior
- Smoke alarm, hardwired, interconnected
- Combination smoke + CO alarm
- Data, Cat6 (TV = data + coax)
- Thermostat (low voltage by HVAC)
- Doorbell button / chime
- Junction box, hardwired equipment
- Disconnect, NEMA 3R
- Panelboard

AF = AFCI GFI = GFCI SA = kitchen small-appliance ckt

PANEL 'A' 200A 120/240V 1Φ 3W 40 SPACE

Fed from 200A meter-main outside (east garage wall). 4/0 Al SER feeder, neutral/ground separated.

CKT	LOAD	BKR	TYPE	WIRE
1/3	Range (NEMA 14-50)	50/2	-	6/3
2/4	Dryer (NEMA 14-30), laundry	30/2	GF	10/3
5/7	Water heater 50 gal, 4.5 kW (garage)	30/2	-	10/2
6/8	Heat pump condenser 3 ton *	30/2	-	10/2
9/11	Air handler w/ 8 kW strip (attic) *	50/2	-	6/2
10/12	EV-ready 14-50, garage (OPTION)	50/2	GF	6/3
13	Kitchen counter SA-1 (left of sink, range wall)	20	AF+GF	12/2
14	Kitchen counter SA-2 (right of sink, peninsula, dining)	20	AF+GF	12/2
15	Refrigerator	20	AF	12/2
16	Dishwasher	20	AF+GF	12/2
17	Disposal	20	AF+GF	12/2
18	Microwave over range	20	AF	12/2
19	Washer + laundry	20	AF+GF	12/2
20	Owner's bath recepts, lights, fan	20	GF	12/2
21	Bath 2 recepts, light, fan	20	GF	12/2
22	Garage recepts + opener	20	GF	12/2
23	Exterior WP recepts (front, back, HVAC)	20	GF	12/2
24	Great room recepts + TV wall	20	AF	12/2
25	Great room, dining, kitchen lts + fan	15	AF	14/2-3
26	Owner's bedroom recepts + fan/light	15	AF	14/2-3
27	Owner's hall, laundry, closet lts, hall rec	15	AF	14/2-3
28	Bedroom 2 recepts + lights	15	AF	14/2-3
29	Bedroom 3 recepts + lights	15	AF	14/2-3
30	Office / bedroom 4 recepts + lights	15	AF	14/2-3
31	Foyer, hall lts + recepts, ALL smoke/CO	15	AF	14/2-3
32	Garage (6) FR wafers, attic lt + attic HVAC recept (GFI)	15	-	14/2
33	Exterior lights, porch + patio fans	15	-	14/2-3
34/36	Surge protective device (230.67)	20/2	SPD	-
35-40	Spare / space (6)			

AF = combination AFCI breaker. GF = GFCI. AF+GF = dual-function AFCI/GFCI breaker OR AFCI breaker + GFCI receptacle at the first device. Both are code; price both.

Kitchen circuits are 20A AFCI, always. * HVAC breakers per nameplate MOCP.

6 two-pole + SPD = 14 spaces; 21 single = 21 spaces; 35 of 40 used.

LOAD CALC (NEC 220.82, see load-calc.pdf)

General loads 46,200 VA -> 24,480 VA after demand

Heat (larger HVAC option) 10,900 VA

TOTAL 35,380 VA = 147.4 A at 240V -> min. 150 A

200A service provided (53 A headroom; EV option included).

GENERAL NOTES

1. Code: NEC 2020 (LA adopted) + 2021 IRC. Verify parish/AHJ amendments before pricing (MetroCode jobs want AFCI on lights, fridge, hood and dual-function breakers on dishwasher + disposal).
2. Service: 200A meter-main w/ outdoor emergency disconnect (230.85) on east garage wall. Panel 'A' on the inside face of that same exterior wall, back to back with the meter (shortest feeder). Not in a closet/bath (240.24); 30"x36" clear in front. Garage lights: (6) fire-rated wafers. Whole-home SPD required (230.67).
3. Receptacles: tamper-resistant (406.12), WR damp/wet (406.9). 16" AFF UNO; counters 44"; laundry 42"; garage 48" (210.52(G) max 5'-6"); exterior 18".
4. Walls laid out to 210.52(A) 6'/12'. Counters 210.52(C)(1): no point >24" from a receptacle, every counter space 12"+ gets one.
5. Peninsula 15.6 sf = 2 receptacles (2020 210.52(C)(2): 1 per first 9 sf + 1 per 18 sf more). On kitchen-side cabinet face <=12" below top where overhang <=6", or listed pop-up. Never face-up. Confirm w/ cabinet layout.
6. Bath circuits 20A GFI (210.11(C)(3)), each serves its own bath (lights + fan allowed). No pendant/chandelier over the tub: 9' ceiling is inside the 410.10(D) zone (3' horiz / 8' above rim). Wet-rated can only.
7. Laundry: dryer 30A 4-wire GFCI (2020 210.8(A)(10) laundry = 125-250V). Dishwasher GFCI 210.8(D); disposal GFCI (within 6' of sink).
8. HVAC: 3-ton heat pump (1 ton / 600 sf, rounded up) + 8 kW strip, AH in attic over owner's hall, condenser east side. 210.63: GFI-WP at condenser + GFI recept at AH; attic light switched at the stair (210.70(A)(3)). 2020 210.8(F) GFCI on the condenser: confirm LA/AHJ amendment before buying.
9. Smoke/CO (IRC R314/R315): hardwired, interconnected, battery backup. SD in each bedroom (office counted), S/CO outside each sleeping area (attached garage). Keep 36" from fan blades and supply registers.
10. Fans: fan-rated box (314.27(C)), 14/3 so fan + light switch separately.
11. Kitchen: under-cabinet LED on all upper runs; OTR microwave recept inside the cabinet above the range; disposal switch at sink (or air switch).
12. Low voltage: Cat6 home runs to data + TV, TV wall gets recept + data + coax + 2" conduit to attic. Doorbell: video button, transformer at chime.
13. EV-ready 14-50 is an OPTION (delete if owner declines; 625 + 210.8(A)).
14. Not on this plan (his adders): soffit lights, floor outlets, 2nd island, generator / transfer switch, tub chandelier, outdoor kitchen.
15. CONCEPT DRAFT. Devices follow plan 003 furniture; move w/ owner walk.

PLAN 003 - OWNER'S ENTRY

3 bed + office | 2 bath | 2-car garage | 1,800 heated sq ft | all-electric | 200A service

E-1 ELECTRICAL PLAN SCALE: 1/8" = 1'-0" on 11x17

CONCEPT DRAFT - NOT FOR CONSTRUCTION. Verify w/ AHJ + owner selections.

E-1

REV 11-08 12:35 PM

Foch An Electrical Co.
Licensed Electrical Contractor · Lic. 55468

(337) 277-9200
fochelc.com
Lafayette, LA

RESIDENTIAL LOAD CALCULATION

Single family dwelling · NEC 2020 Article 220.82, Optional Method · 120/240V single phase

Address	Plan 003 "Owner's Entry" (concept)	**Date**	11/07/2026
Owner	Spec / TBD	**Builder**	TBD
Living area	1,800 sq ft	**Prepared by**	Andrew Young

A. GENERAL LOADS · 220.82(B)

1	Lighting and receptacles	1,800 sq ft × 3 VA	5,400
2	Small appliance circuits	2 × 1,500 VA	3,000
3	Laundry circuit	1 × 1,500 VA	1,500
4	Electric range	12 kW nameplate (assumed)	12,000
5	Electric clothes dryer	Nameplate, 5,000 VA min (220.54)	5,000
6	Water heater, 50 gal electric (garage)	4,500 W elements	4,500
7	Dishwasher	Nameplate / typical	1,200
8	Disposal	Nameplate / typical	900
9	Microwave over range	Nameplate / typical	1,500
10	Refrigerator	Nameplate / typical	800
11	Bath exhaust fans	2 x 100 VA	200
12	Garage door opener	1 door x 600 VA	600
13	EV-ready 14-50 receptacle (OPTION)	40 A charger x 240 V (220.57, > 7,200)	9,600
	Subtotal		**46,200**
	First 10,000 VA at 100%		10,000
	Remainder 36,200 VA at 40%		14,480
	General load after demand		**24,480**

B. HEATING AND AIR CONDITIONING · 220.82(C), LARGER OF

	Heat pump heating: compressor + blower, plus 65% of 8 kW strip used	5,700 + 0.65 x 8,000 (220.82(C)(4))	10,900
	Heat pump cooling, 3 ton + air handler blower	~1,900 VA / ton	5,700

GAS APPLIANCES (NOT PART OF THE ELECTRICAL LOAD)

None

CALCULATED LOAD	AT 240V SINGLE PHASE	SERVICE REQUIRED
35,380 VA	**147.4 A**	**150 A**
35.4 KVA	24,480 + 10,900 VA ÷ 240V	NEC 220.82 AT 100%, UP TO 150 A

NOTES

- All-electric house assumed: no gas on the plan. If the builder brings gas (range, dryer, water heater), rerun; the number only drops.
- Heat pump size is not on the plan: 1 ton per 600 sq ft of living area = 3 ton. 8 kW strip assumed (south Louisiana). Use the real condenser + air handler nameplates when picked.
- Small appliance circuits: 2 kitchen counter circuits (SA-1, SA-2, island + dining on SA-2). Laundry: 1.
- EV-ready 14-50 is an option. Without it: 31,540 VA = 131.4 A (still a 150 A minimum). It is included so the service is sized for it.
- Calc is under 200 A, so the 200 A meter-main + 200 A panel shown on E-1 is enough, with room for a future generator transfer switch.
- No gas appliances, so there is nothing to list for gas line sizing.

Signature _____ Name / Lic. 55468 _____ Date _____